

ACKNOWLEDGEMENT BASED TRANSMISSION IN OPTICAL NETWORKS

*B.Shincy Mercylin ** Mrs.Manchu.M
Ponjesly College of Engineering
shincymercylin@gmail.com, manjudhas2004@gmail.com

ABSTRACT:

In optical networks, the delivery of a traffic flow with a certain bandwidth demand over a single network path is either not possible or not cost-effective. In these cases, it is very often possible to improve the network's bandwidth utilization by splitting the traffic flow over multiple efficient paths. While using multiple paths for the same traffic flow increases the efficiency of the network, it consumes expensive forwarding resources from the network nodes such as wavelengths/light paths of optical networks. The problem of reducing forwarding cost can be defined in two cases such as Routing with Minimum Overhead and Decomposition with Minimum Overhead. Thus this project can be extended by introducing a mechanism for filtering highly distributed denial-of-service attacks. It also prevents malicious nodes seeking to disrupt the communications of other nodes by ACK based transmission.

Keywords – Multipath flows,optical networks,routing

1. INTRODUCTION

Networking is the practice of linking multiple computing devices together in order to share resources. These resources can be printers, CDs, files, or even electronic communications such as e-mails and instant messages. These networks can be created using several different methods, such as cables, telephone lines, satellites, radio waves, and infrared beams.

A computer network facilitates interpersonal communications allowing people to communicate efficiently and easily via email, instant messaging, chat rooms, telephone, video telephone calls, and video conferencing. Providing access to information on shared storage devices is an important feature of many networks. A network allows sharing of files, data, and other types of information giving authorized users the ability to access information stored on other computers on the network. A network allows sharing of network and

computing resources. Users may access and use resources provided by devices on the network.

Without the ability to network, businesses, government agencies, and schools would be unable to operate as efficiently as they do today. Perhaps even more valuable is the ability to access the same data files from various computers throughout a building. This is incredibly useful for companies that may have files that require access by multiple employees daily. By utilizing networking, those same files could be made available to several employees on separate computers simultaneously, improving efficiency.

2. EXISTING SYSTEM

In Computer networks, using multiple paths for a traffic flow is useful when routing over a single path is impossible or too expensive. However it consumes expensive forwarding resources thus increases the forwarding

cost. Hence it is required to split the traffic flow over multiple paths while minimizing the forwarding cost. Christo Ananth et al. [5] proposed a secure hash message authentication code. A secure hash message authentication code to avoid certificate revocation list checking is proposed for vehicular ad hoc networks (VANETs). The group signature scheme is widely used in VANETs for secure communication, the existing systems based on group signature scheme provides verification delay in certificate revocation list checking. In order to overcome this delay this paper uses a Hash message authentication code (HMAC). It is used to avoid time consuming CRL checking and it also ensures the integrity of messages. The Hash message authentication code and digital signature algorithm are used to make it more secure. In this scheme the group private keys are distributed by the roadside units (RSUs) and it also manages the vehicles in a localized manner. Finally, cooperative message authentication is used among entities, in which each vehicle only needs to verify a small number of messages, thus greatly alleviating the authentication burden.

3. PROPOSED SYSTEM

In the proposed system acknowledgement based transmission is proposed. The drawbacks in existing system can be extended by introducing a mechanism for filtering highly distributed denial-of-service attacks. It can block a thousand undesired flows, while only requiring a hundred filters. It also prevents malicious nodes seeking to disrupt the communications of other nodes. We showed that multipath flow has the capability of blocking unwanted flows from the same source from different paths, even before they can occur. Thus the process will overcome the attacks. The adversary is specialized on dropping/removing all data packets and/or all ACK packets passing is overcome by the proposed model.

4. SYSTEM DESIGN

The overview of the proposed system architecture is given as follows

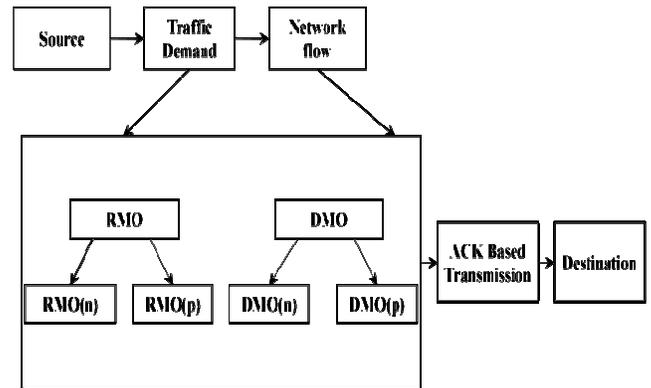


Fig 4.1 Architecture for proposed system

Fig 4.1 shows that splitting a traffic flow over multipath consumes extra forwarding resources. These resources are related to number of paths and nodes. so the source can use the traffic demand as input to RMO and this solution minimizes the both the number of paths and nodes but the bandwidth cost will be higher so the minimum cost network flow will be find and this network flow along with the traffic demand will be given as an input to DMO in order to decompose it into a set of paths which minimizes the forwarding cost. In that some of the malicious nodes were present to destroy communication so the ACK based transmission is used to find that malicious nodes and then data can be send to the destination efficiently.

5. MODULES DESCRIPTION

There are five modules:

Data owner

Data owner module creates the nodes in the optical network. The data owner manager performs the process of monitoring and controlling the network devices to find where the nodes are located. This module organize and maintain the details about all components of the network. This component collects the packets from the networks, which are in-turn specified by the user and transfer

it to the destination. This also identifies the source and destination to transfer the data. Data owner module implements policies, procedures, techniques and tools that are required to manage evaluate the changes, track the status of change and to maintain an inventory of system and support documents as the system changes.

Routing with minimum overhead

In routing with minimum overhead only a traffic demand must (source, destination, and bandwidth demand) is given and the problem is to find a set of simple paths between the source and the destination nodes over which the bandwidth demand can be delivered while minimizing the number of paths or the number of nodes they traverse.

RMO should be solved using a solution for DMO as a subroutine. To solve RMO first a feasible network flow that satisfies the bandwidth demand is to be constructed. After the flow is constructed, it is decomposed into paths.

$$\sum_{i=0}^{k*} \alpha \left[\frac{w_i}{\alpha} \right] \leq \alpha \left[\frac{B}{\alpha} \right] \quad (5.1)$$

Let $\alpha[B/\alpha]$ is the value of the flow. Scaling algorithm uses a parameter α for the scaling process. The algorithm finds a network flow whose value is slightly less than B using no more than $[B/\alpha]$ paths. Choosing a larger α would yield fewer paths whose total bandwidth is smaller. The algorithm used here is scaling algorithm that is used to finds a network flow whose value is slightly less than the bandwidth. The overhead should be measured by RMO using path and RMO using node. In RMO(P) for a given traffic demand(source, destination and bandwidth demand) find a minimum set of paths which satisfies it. In RMO(N) for a given traffic demand source, destination and bandwidth demand) find a set of paths which satisfies this flow while traversing a minimum number of nodes.

Decomposition with minimum overhead

In decomposition with minimum overhead both the traffic demand (source, destination, and bandwidth demand) and network flow that satisfies the bandwidth demand between the source and the destination must be must be given. This network flow is predetermined according to some bandwidth efficiency criteria such as bandwidth cost, and the problem is to break into a set of simple paths between the source and the destination nodes over which the bandwidth demand can be delivered while minimizing the number of paths or the number of nodes they traverse.

The input network flow for DMO is f , while $f(e)$ is the value of f carried over edge e . Let $f(p)$ denote the value of a single path flow carried over p .

$$f(p) = \min_{e \in p} \{f(e)\} \quad (5.2)$$

$$f^i(p_i) \geq f^i(p_j) \quad (5.3)$$

The right handside in equation (5.2) denotes the entire set of optimal paths can decompose the network flow f . The left handside in equation (5.3) denotes the cost of each b bandwidth units routed by p_i . Let p_i be the path chosen by the algorithm in the the i th iteration and p_j denotes the path in the optimal solution.

Now equation (4.3) becomes

$$\text{OPT. } f^i(p_i) \geq \sum_{j=1}^{\text{OPT}} f^i(p_j) B^i/b \quad (5.4)$$

Let OPT denotes the number of paths in the optimal solution and the value of j ranges from one to OPT and b denotes the edges capacities. The algorithm used here is greedy algorithm that is used to finds a single path flow whose bandwidth is maximum until it reaches a total bandwidth of B . The overhead should be measured by DMO using path and DMO using node.

In DMO(P) decomposing a given network flow into a minimum number of paths which satisfies it. In DMO(N) decomposing a given network flow into a minimum number of paths while traversing a minimum number of nodes.

ACK based transmission

In this a unique id is provided to each and every node in the network when one node sends data to another node if that node does not give any response means it is a malicious node.

6. CONCLUSION

In Computer networks, using multiple paths for a traffic flow is useful when routing over a single path is impossible or too expensive. However it consumes expensive forwarding resources, thus increases the forwarding cost. These resources are proportional to number of paths and number of nodes. Hence it is required to split the traffic flow over multiple paths. To improve bandwidth utilization, it is often desirable to split one traffic flow over multiple paths while minimizing the associated forwarding cost. Two important optimization problems results namely Decomposition with Minimum forwarding Overhead (DMO) and Routing with Minimum forwarding Overhead (RMO). It showed that both problems are NP-hard and presented approximation algorithms. It present efficient practical heuristics for RMO. These heuristics first find an initial network flow and then decompose it using the DMO approximation. The procedure for selecting the initial network flow was shown to have a critical impact on the performance of the algorithm. WID/LEN gave the best tradeoff between bandwidth cost and forwarding overhead and ACK based transmission is used to find malicious nodes.

7. FUTURE WORK

The main objective is to break the network traffic flow into a set of simple paths between the source and destination nodes. It also aims to find a set of simple paths between the source and destination nodes over which the bandwidth demand can be delivered while minimizing the number of paths or the number of nodes they traverse. Then a mechanism for filtering highly distributed denial-of-service attacks is introduced. It can block a thousand of undesired flows, while only requiring a hundred filters. It also prevents malicious nodes seeking to disrupt the communications of other nodes. In future it can be extended by keeping a blacklist of that malicious

nodes.

REFERENCES

- [1] G. Baier, E. Köhler, and M. Skutella, -The k-splittable flow problem,| *Algorithmica*, vol. 42, no. 3–4, pp. 231–248, 2005.
- [2] R. Banner and A. Orda, -Efficient multipath-routing schemes for congestion minimization,| Technion—Israel Institute of Technology, Haifa, Israel, Tech. rep., 2004.
- [3] A. Curtis, J. Mogul, J. Tourrilhes, P. Yalagandula, P. Sharma, and S. Banerjee, -DevoFlow: Scaling flow management for high-performance networks,| in *Proc. ACM SIGCOMM*, 2011, pp. 254–265.
- [4] O. Gerstel, R. Ramaswami, and G. H. Sasaki, -Cost-effective traffic grooming in WDM rings,| *IEEE/ACM Trans. Netw.*, vol. 8, no. 5, pp. 618–630, Oct. 2000.
- [5] Christo Ananth, M. Danya Priyadarshini, “A Secure Hash Message Authentication Code to avoid Certificate Revocation list Checking in Vehicular Adhoc networks”, *International Journal of Applied Engineering Research (IJAER)*, Volume 10, Special Issue 2, 2015, (1250-1254)
- [6] P. Patel, and S. Sengupta, -VL2: A scalable and flexible data center network,| in *Proc. ACM SIGCOMM*, Barcelona, Spain, 2009, pp. 51–62.
- [7] A. Medina, A. Lakhina, I. Matta, and J. Byers, -BRITE: An approach to universal topology generation,| in *Proc. MASCOTS*, 2001, p. 346.
- [8] C. Raiciu, S. Barre, C. Pluntke, A. Greenhalgh, D. Wischik, and M. Handley, -Improving datacenter performance and robustness with multipath TCP,| in *Proc. ACM SIGCOMM*, Toronto, ON, Canada, 2011, pp. 266–277.